

# Telescopic Boom Lift

**UpRight**  
POWERED ACCESS



- 16.2m max. working height
- 14.2m max. outreach
- 1.8m, 140° jib
- Driveable at full height
- Proportional control of drive, boom lift and slew
- 4 wheel drive


**SB47  
JRT**

*Courtesy of Crane.Market*

# SB47JRT boom lift specifications

SB47JRT	
max. working height	16.2m
max. platform height	14.2m
max. outreach	11.9m
platform capacity (SWL)	227kg
platform size	0.76m x 1.52m
platform rotation	170°
jib length	1.8m
jib working arc	140°
overall width	2.4m
operational width	2.4m
overall length <b>A</b>	8.2m
lowered height <b>B</b>	2.4m
min. transport length	8.2m
gross weight	6,123kg
inside turning radius	1.6m
max. drive speed (lowered)	4.8kmh
ground clearance	250mm
gradeability	41%
tyres	12x16.5 loader lug poly filled
drive system	4 wheel drive
controls	joystick proportional drive, lift and slew/ rheostat other boom functions
power source	Deutz F3L-2011 air cooled diesel 48hp

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

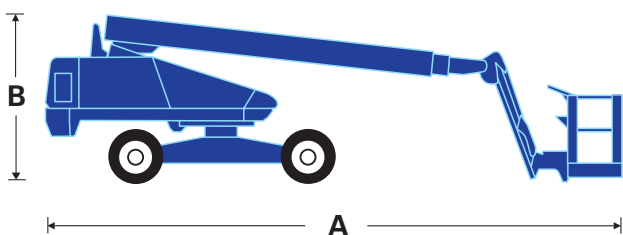

BP1 - SB47JRT 8/07

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


[www.upright.com](http://www.upright.com)

## standard features

- 1.8m, 140° jib
- 170° hydraulic powered platform rotation
- 4 wheel drive
- Proportional control of drive, boom lift and slew
- Foam filled lug tyres
- Driveable at full height
- Operator horn
- Extra finger protection handrail
- 1 year parts and labour warranty
- 5 year structural warranty

## options

- Hydraulic generator
- Platform control box cover
- Twin platform work lights
- Amber beacon on boom
- Swing gate in lieu of drop bar
- Sand blast protection kit
- Driving lights
- Cold weather start kit
- Drive motion alarm
- Towing package
- 1.52m x 0.76m aluminium platform 227kg SWL
- 2.44m x 0.76m aluminium platform 227kg SWL

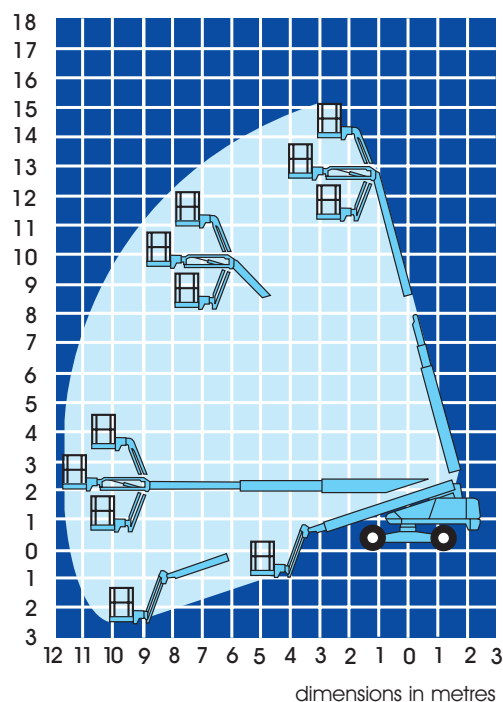

dimensions in metres

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**  
POWERED ACCESS